

Capital Curtain Pole


Fitting, operation and maintenance instructions

Warning! The operating instructions must be read before operating the pole.

Face-Fix Fitting Instructions


This procedure can be completed by non-professionals.

The Face-Fix Brackets are supplied in separate parts, with the Clamping Pieces pre-inserted into the track. These fitting instructions apply to all Face-Fix Bracket options.

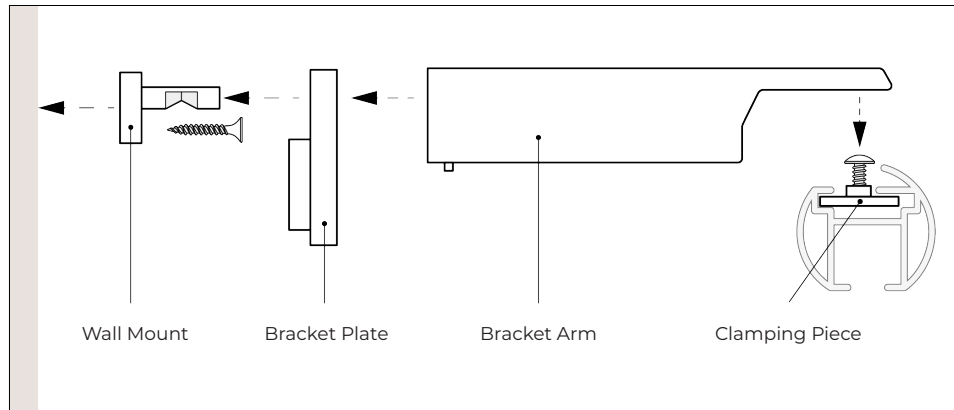


Step 1 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each finial or end cap, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

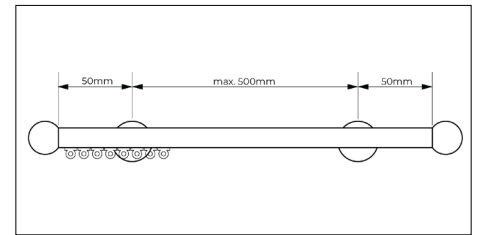


Step 2 - Mark, drill, and secure the Bracket Wall Mount

If necessary, mark the screw positions with a pencil through the bracket slots. Drill and plug the holes as required, then fix the Bracket Wall Mounts (fixings are not supplied).




Step 3 - Install the Bracket Plate

Once the Wall Mounts are securely fixed in place, fit the Bracket Plates.




Step 4 - Install the Bracket Arm

Once the Bracket Arm is attached (A), secure it to the Wall Mount by tightening the screw with an Allen key (B).

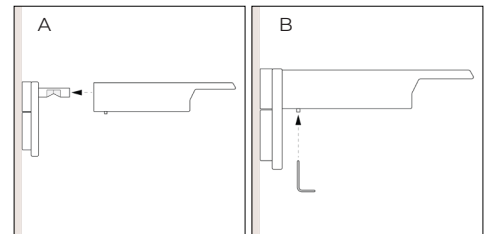


Step 5 - Secure the Pole

Adjust the pre-inserted Clamping Pieces so they align with the Brackets, then slot them into position (A). Once the pole is in place, secure it by tightening the Clamping Piece screws (B).

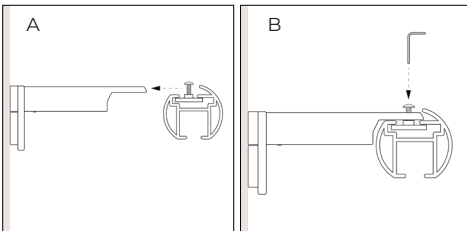

Joined tracks

If your track is longer than 5 metres, it will be supplied in two sections along with a Track Connector. To join sections, slide the provided Track Connector into the groove in the track, and push the sections together (A) until they are aligned, then tighten the connector screws (B).

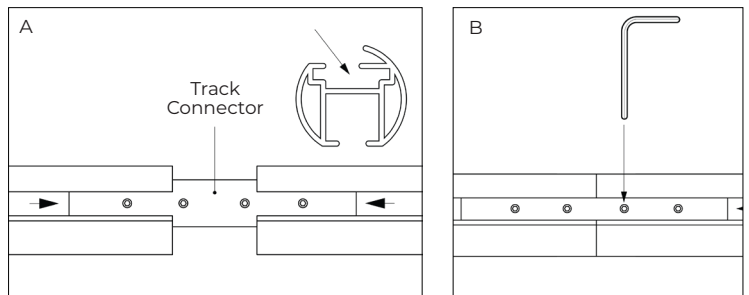


Top-Fix Fitting Instructions

This procedure can be completed by non-professionals. We recommend that it is completed by two people for ease of handling and safety.


Step 1 - Insert and position the brackets

Insert the brackets into the track (A). Ensure that each bracket is positioned at least 50 mm from each finial or end cap, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly, then secure them in place by tightening the Clamping Piece screws (B).

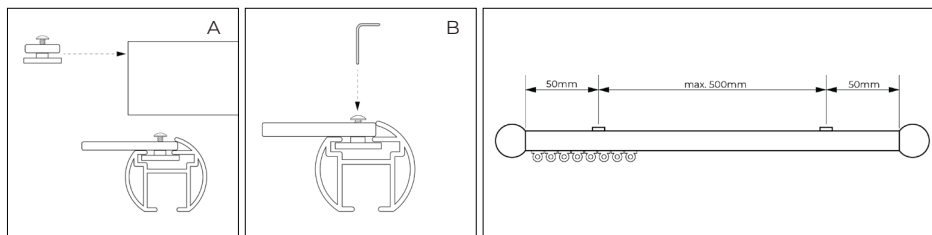

Step 2 - Mark and secure

Mark the screw positions with a pencil through the bracket slots. Drill and plug the holes as required (A). Then fix the track in place by tightening the screws (B).

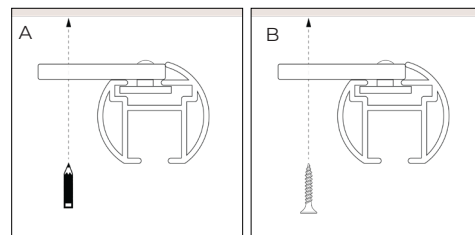

Operation & Maintenance

Warning! The operating instructions must be read before operating the pole.

Operating instructions - Hand Drawn

1. Ensure the pole and curtain fabric is free of obstructions and that gliders move smoothly.
2. Gently pull the curtains along the track to open or close. Avoid forcing them to prevent damage.

Operating instructions - Motorised

1. Ensure the pole and curtain fabric is free of obstructions and that gliders move smoothly.
2. Your motorised curtain track features a convenient “pull to open/close” function. To operate manually, gently pull the curtain in the desired direction to start the opening or closing motion. Alternatively, use the provided control device to operate the curtain electronically.

For detailed information on operating modes, please refer to the Motorisation Instructions supplied with this pole before use.

Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.

For smooth glider movement, a small amount of silicone-based lubricant may be applied.

Do not hang heavy items on the curtain track or pull forcefully. For safety and performance, do not make alterations to the track.